



深圳腾凯特种机电有限公司
SHENZHEN TENKAI GROUP LIMITED

SPECIFICATION FOR APPROVAL

规格承认书

To: 112700200500073X

产品型号 Par No. : BA7060H24B

类别 Category: Fan Blower Centrifugal

认证 Certification: CE ROHS UL TUV

编号 Spec No: BA7060H24B-K251202 版次 Version: 03

样品数 Quantity: 3PCS 日期 Date: 2026-04-04


| Company Stamp | CUSTOMER APPROVAL Stamp |
|---|-------------------------|
|  | |
| 制作: 张友桥 | 承认: |
| 复核: 刘良军 | 核准: |
| 核准: | 日期: |

电话(TEL): 86-0755-23126453 传真(FAX): 86-0755-23129135

邮箱(MAIL): sales@tenkai-group.com

网址(WEB): [Http://www.tkfan.com](http://www.tkfan.com)

地址(ADD): 深圳市龙华区观澜格澜9路金雄达科技园C栋5楼

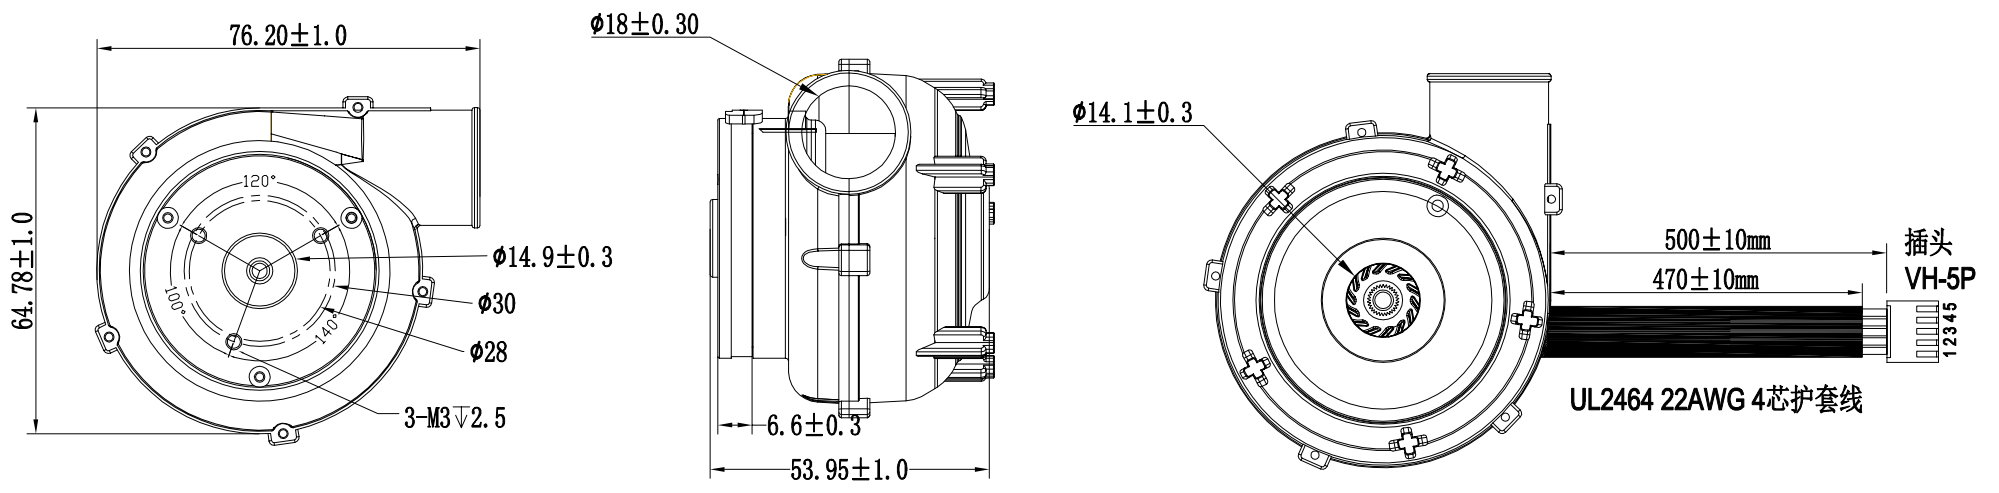

LEAD WIRE:
 UL2464 22AWG OR EQUIVALENT
 PIN1:RED WIRE---(+)
 PIN2:BLACK WIRE---(-)
 PIN3:WHITE WIRE---(PWM)
 PIN4: 空脚
 PIN5:YELLOW WIRE---(FG)

UNIT: $\frac{\text{mm}}{(\text{INCH})}$

| | | | | | | | | | | | | |
|------------|-------------|-------------------|-----------|------------|------------|--|------------|----------|-----------------------------------|------------|------------------------------------|-------------|
| Mark 记号 | REASON 变更原因 | PROJECTION | | 单位 UNIT | | 深圳市腾凯特种机电有限公司 | | | | | | |
| | | | | mm | | SHEN ZHEN TENKAI GROUP LIMITED | | | | | | |
| | | 比例 SCALE | | 1:1 | | 型号 Model NO. | BA7060H24B | | 图号 Drawing NO. BA7060H24B-K251202 | | | |
| | | 公差 TOL | LINEAR | X | .X | .XX | 制图 Drawing | 薛雨均 | 日期 Date | 2025.12.02 | 描述 Description DC BRUSHLESS BLOWER | |
| | | | (0,50] | ± 0.5 | ± 0.10 | ± 0.05 | | 检查 Check | 张友桥 | 日期 Date | 2025.12.02 | 材质 Material |
| | | (50,100] | ± 0.8 | ± 0.20 | ± 0.10 | 批准 Approved | | 日期 Date | | 表面 Finish | 版次 Rev A0 | |
| | | (100,+ ∞) | ± 1 | ± 0.30 | ± 0.15 | It is prohibited to duplicate this document without explicit authorization or to hand it over to others for use. | | | | | | |

規格參數

SPECIFICATION

| Model 型号: | | | |
|--------------------------------|----------------------------------|--------------------|------------------------|
| Item 项目 | Unit 单位 | Specification 參數 | Condition 條件 |
| Dimension 尺寸 | Mm 毫米 | 76.2X64.78X53.95 | LxWxThickness 长宽高 |
| Bearing System 轴承类型 | ---- | Two Ball Bearing | ---- |
| Rated Voltage 额定电压 | VDC | 24 | 60Hz |
| Operating Voltage Range 操作电压范围 | VDC | 18~ 40 | At 25°C |
| Start-up Voltage 启动电压 | VDC | ≤18 | At 25°C |
| Rated Current 额定电流 | Amp 安培 | 2.2±10% | At Rated 在额定电压下 |
| Lock Rotor Current 锁定电流 | Amp 安培 | 0 | Locked 锁死 |
| Rated Power 额定功耗 | Watt 瓦特 | 52.8±10% | At Rated 在额定电压下 |
| Rated Speed 额定转速 | RPM 圈/分钟 | 36000±10% | AT Rated Voltage 30 °C |
| Air Flow 风量 | CFM | 16.2 | In Free Air 无风阻条件 |
| Static Air Pressure 静压 | mmH ₂ O | 742.3 | When Air Flow= 0 |
| Noise Level 噪音 | dBA | 72.6 | At Rated Speed 额定速 |
| Polarity protection 反向保护 | -- | Reverse protection | NO |
| Other Spec. | Tachometer Output 转速反馈 | | YES |
| | Soft-restart function 软启动 | | YES |
| | Lock Protection 锁定保护 | | YES |
| | Lock Rotor Alarm 锁定报警 | | NO |
| | PWM Control 速度控制 | | YES |
| | Thermal Control 过热保护 | | NO |
| | Over voltage protection 过压保护 | | NO |
| | Over current protection 过流保护 | | NO |
| | fixedconstant speed Function恒速功能 | | NO |
| Connection Lead Type 连接方式 | Lead Wire 导线型号 | 500mm2464#22AWG | See Page 3 见图纸 |
| | Connector 端子 | VH-5P | See Page 3 见图纸 |
| Life Expectancy 预期寿命 | Hours 小时 | 10000hrs | At 25°C 在 25°C条件下 |
| Net Weight 净重 | g 克 | 200g | 1PCS |
| 备注 Note | 用不锈钢滚珠, PCB板灌胶 | | |

| | |
|-----------------------------------|--|
| 絕緣耐壓 Dielectric Strength | 5mA Max./導線与外框間測量 · 500VAC/min 5mA Max./Measured between lead wire(+)and frame at 500VAC/min |
| 極數 Number of Pole | 6槽 2極 6slots and 2poles |
| EMC | |
| 運轉溫/濕度範圍 Operating temp. Range | 溫度/temperature: -40℃~65℃ 濕度/Humidity: 35%~85%RH |
| 絕緣阻抗 Insulation Resistance | 10MΩ / 裸線与外框間測量, 500VDC/min 10MΩ/between unshackled wire and frame at 500VDC/min |
| 耐濕性 Humidity | 電器規格依據 MIL-STD 202F Method 103B 濕度: 95%RH, 溫度: 40±2℃ According to MIL-STD 202F Method 103B Humidity: 95%RH,Temp.: 40±2℃ |
| 熱衝擊 Thermal Shock | 電器規格依據 MIL-STD 202F Method 107D According to MIL-STD 202F Method 107D |
| 絕緣階段 Insulation Shock | UL: A 種 UL: Class A |

| | | | | | | | | | | |
|--|--|----------------------|---------------------------------|----------------------------------|-------------------|--|-----------|-------------|--|--|
| SHENZHEN TENKAI GROUP | | MODEL NO. | | BA7060H24B | | | | | | |
| MTBF REPOPT | | | | | | | | | | |
| STARTED DATE: 2020.10.16 | | | | FINISHED DATE: 2020.10.31 | | | | | | |
| TEST CONDITIONTEST (1) VOLTAGE:24VDC (2) TEMPERATURE: 75℃ | ITEM | SPECIFICATION | TEST SAMPLES | | 20 | | | | | |
| | OPERATION VOLTAGE | 24VDC | TEST HRS/EA | | 800 | | | | | |
| | CUPPENT DPAIN | MAX ≤2.2A±10% | TOTAL TEST HRS | | 16,000 | | | | | |
| | SPEED | 36000RPM±10% | FAILURE Q'TY | | 0 | | | | | |
| | ACOUSTICAL NOISE | | CONFIDENCE LEVEL | | 90% | | | | | |
| | | | MTBF | | 10440hours | | | | | |
| FAILURE DEFINITION | ITEM | | CHECK POINT AT THE HOURS | | | | | | | |
| (1) CURRENT:= 10%/ -30%of Original value | TEST DURATION(HRS) | | 250 | 500 | 1k | 1.5k | 2k | 2.2k | | |
| | ACCUMULATED FAILURE Q'TY | | 0 | 0 | 0 | 0 | 0 | 0 | | |
| | SURVIVAL Q'TY | | 20 | 20 | 20 | 20 | 20 | 20 | | |
| | ACCUMULATED FAILURE RATIO | | 0% | 0% | 0% | 0% | 0% | 0% | | |
| (2) RPM: 30%/ -15%of Original value | FAILNO.TEST TIME(HRS)SURVIVAL Q'TY | | | | | | | | | |
| | ACCUMULATED FAIL RATIO | | | | | | | | | |
| | DESCRIPTION | | | | | | | | | |
| (3) NOISE Over±10% of LEVEL: origin | TEST RESULT: 1. FORMULA OF FIGURING OUT ACCELERATION FACTOR: Tu: Required Temp (25℃) Ta: Experiment Temp.(75℃) $AF = 2^{\wedge} \left[\frac{Ta - Tu}{65 - 25} \right]$ $= 2^{\wedge} \left[\frac{75 - 25}{10} \right]$ $= 17$ MTBF=[ACTUAL TEST TIME*SAMPLE Q'TY]*AF/TR/SAMPLE Q'TY MTBF=[(800*20)*17]/1.3026/20=10440HOURS | | | | | 2. CONFIDENCE LEVEL: ACCORDING TO GEM TABLE90% ZERO FAILURE TR=1.3026 | | | | |
| | APPROVED BY: BOPING GONG | | CHECKED BY: SHU LIN XIE | | | TESTED BY: JUN ZHANG | | | | |

風扇特性曲線風量風壓測試報告

The Report of Fan Performance P-Q Curve Test

1. 產品特性依照 AMCA-210 標準在雙箱里包括風量與風壓的測試。

The performance including air flow and air pressure measured in Double Chamber is measured according to AMCA210-92 standard.


測試編號(No.): 6537 測試日期(Date) : 2025/03/29

2. 測試數據:

| 序號 No. | 項目 Item | 規格 Specification | 單位 Unit |
|--------|---|------------------|--------------------|
| 1 | 測試電壓 Test Voltage | 24 | VDC |
| 2 | 轉速 Speed | 36000 | RPM |
| 3 | 大氣壓力 Barometric Pressure | 761.5 | mmHg |
| 4 | 相對濕度 Relative Humidity | 45 | % |
| 5 | 最大風量(零靜壓時)Max.Air Flow(At Zero Static Pressure) | 16.2 | CFM |
| 6 | 最大風壓(零風量時) Max. Air Pressure(At Zero Air Flow) | 742.3 | mmH ₂ O |

3.P-Q 數據及曲線 P-Q Data and Curve

| 序號 | mmAq | CFM | A | Watt | RPM |
|----|--------|-------|------|------|-----|
| 1 | 742.25 | -0.02 | 0.87 | 20.9 | |
| 2 | 726.5 | 3.64 | 1.64 | 39.6 | |
| 3 | 678 | 7.01 | 2.25 | 54.1 | |
| 4 | 424 | 9.88 | 2.2 | 52.9 | |
| 5 | 304.25 | 11.55 | 2.2 | 52.9 | |
| 6 | 225.75 | 12.72 | 2.2 | 53.1 | |
| 7 | 174 | 13.54 | 2.19 | 52.8 | |
| 8 | 0 | 16.17 | 2.17 | 52.4 | |

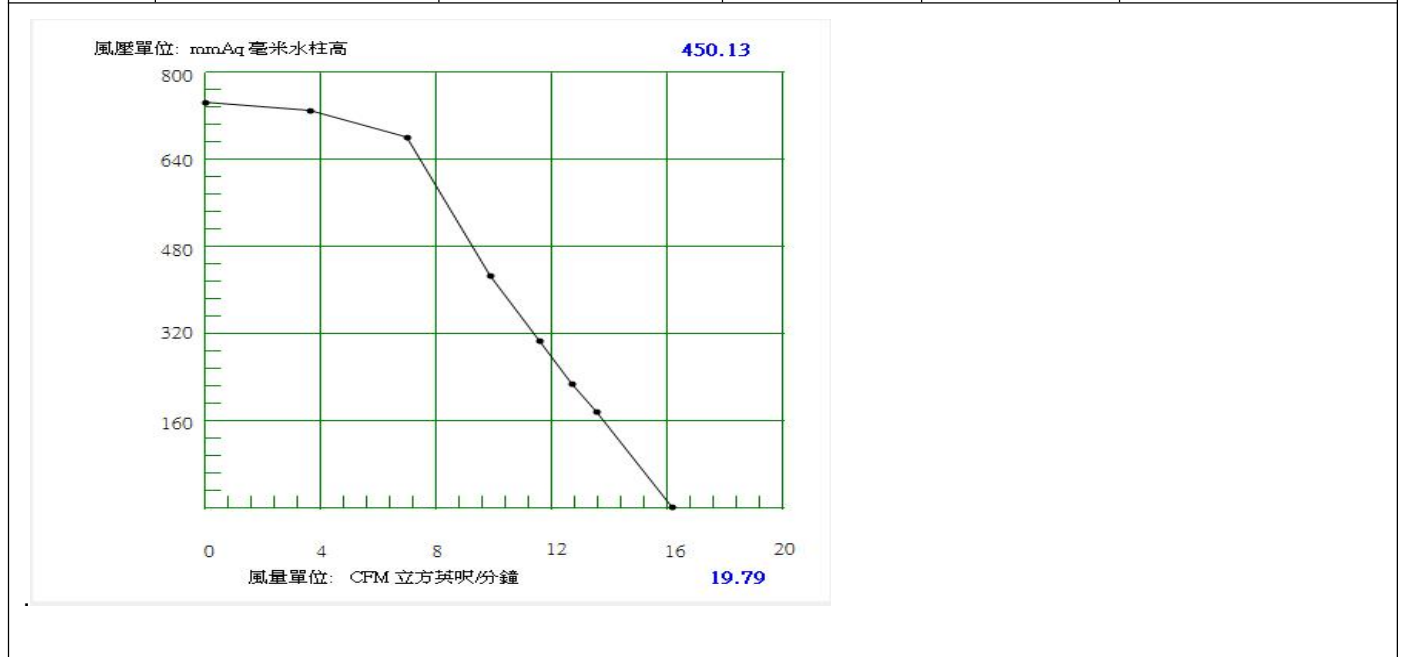

风扇特性曲线 PWM 测试报告

The Report of Fan Performance PWM Curve Test


测试编号(No.):7564

测试日期(Date) : 2025-12-02

1.测试数据:

| 序号 | 百分比 | 转速 | 单位 Unit |
|----|-------|-------|---------|
| 1 | 10 % | 14900 | RPM |
| 2 | 20 % | 18000 | RPM |
| 3 | 30 % | 21200 | RPM |
| 4 | 40 % | 24100 | RPM |
| 5 | 50 % | 27100 | RPM |
| 6 | 60 % | 29900 | RPM |
| 7 | 70 % | 32600 | RPM |
| 8 | 80 % | 35300 | RPM |
| 9 | 90 % | 35900 | RPM |
| 10 | 100 % | 35900 | RPM |

2.PWM 数据及曲线 PWM Data and Curve

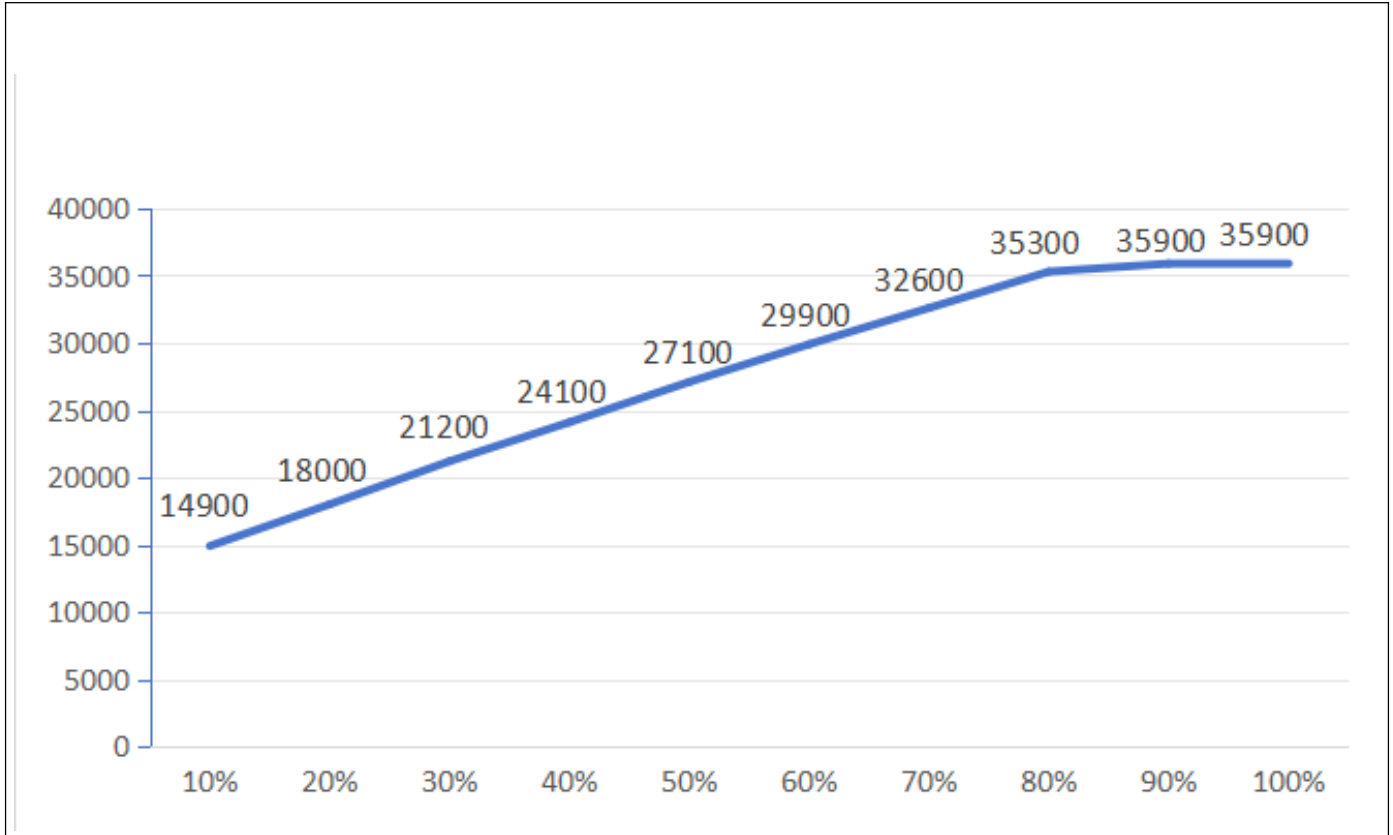

噪音测试报告





The Report of Acoustic Noise Test

报告编号 Report No.TN1511309

| | |
|--|---|
| 样品名称 Sample Name | Brushless Fan / Blower |
| 测试条件 Test Condition | 测试方法 Test Method |
| 1.温度 Temperature : 31 °C 2.湿度 Humidity: 75 %RH | 1.测试位置 Test Position : 180° 2.测试距离 Test Distance : 1.0M From the fan intake 3.背景噪音 Background Noise : 23.7dB(A) 4.测试依照标准 ISO3745 执行 This test executes according to ISO3745 standard |
| 测试设备 Test Equipment: 声望 VA-Lab2 二通道噪声频谱分析仪 BSWA VA-Lab2 double channels noise Spectrum Analyzer | |
| 测试结果 Test Result: Leq:72.6dB(A); 测试距离 Test distance : 1 meter | |
| | |
| 测试结果 Test Result: Leq:23.7dB(A); 背景噪音 Background Noise | |
| | |

※本报告未经许可严禁擅自更改其中内容 Do not change the content of this report without written permission of authority;
 ※一般情况, 委托检验结果仅对所检验样品有效 Generally, commission test is responsible for the tested samples only;
 ※报告无主检、审核人签字无效 The test report is invalid without the signatures of Author and Reviewer.

实物图
The pictures

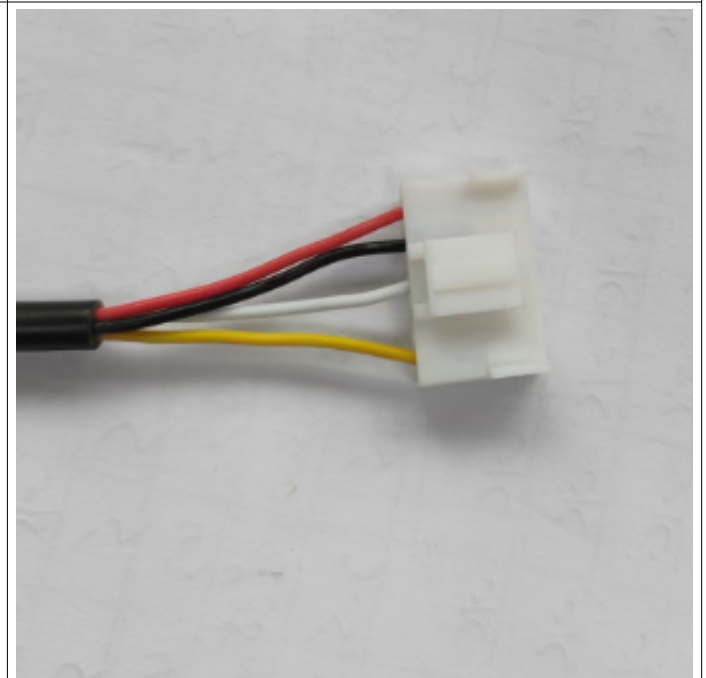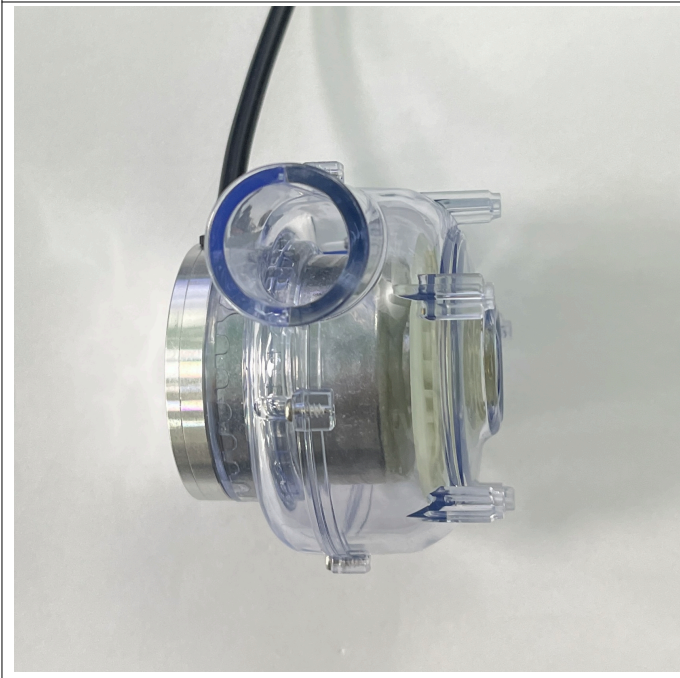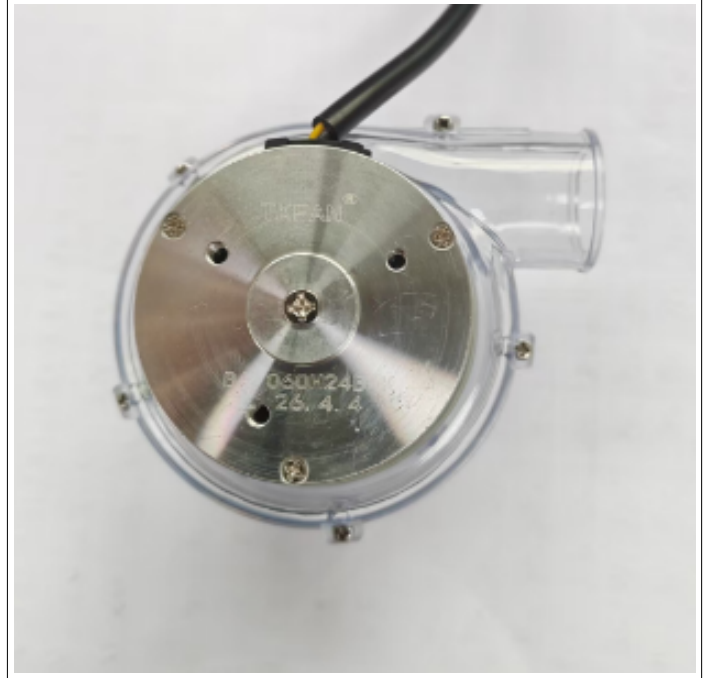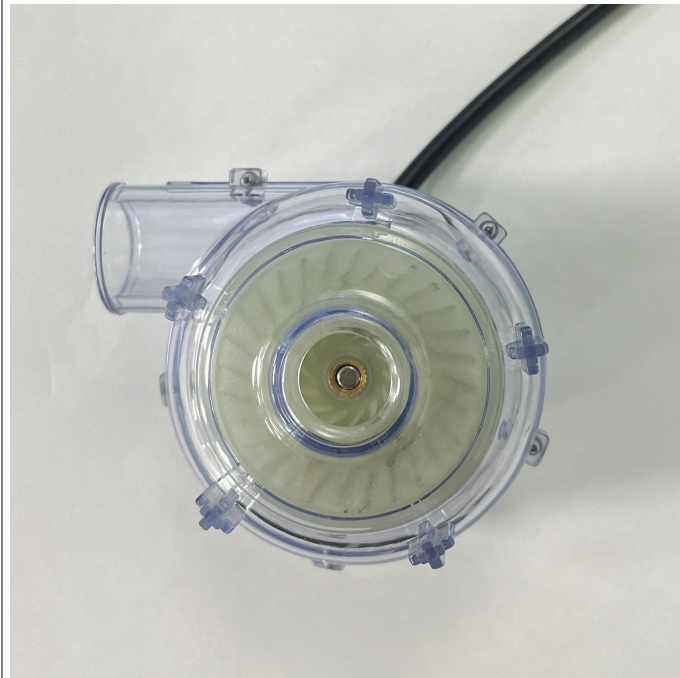


功能描述

Functional description

一. PWM CONTROL SIGNAL PWM 控制信号:

SIGNAL VOLTAGE RANGE 控制电压输入范围:0.0~+5.0VDC

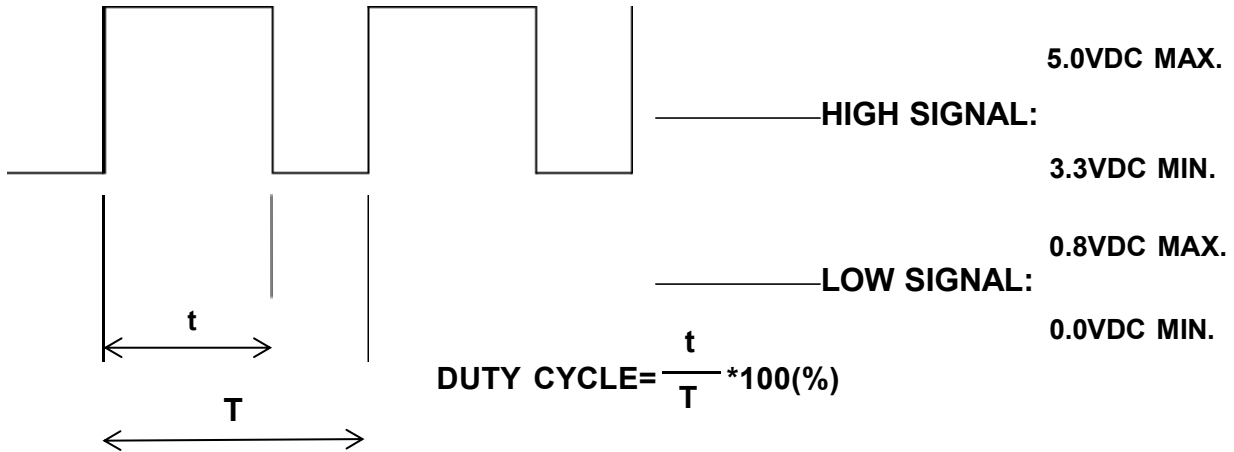

- THE FREQUENCY FOR CONTROL SIGNAL OF THE FAN SHALL BE ABLE TO ACCEPT 16K~32 KHZ.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 25K HZ.
- AT 100% DUTY CYCLE,THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE,THE ROTOR WILL STOP.
- WHEN CONTROL SIGNAL LEAD DISCONNECTED,THE FAN WILL MAXIMUM SPEED.
- AT 25K 7% ,~9% DUTY CYCLE,THE FAN WILL BE ABLE TO START FROM A DEAD STOP.
- THE FAN SPEED CONTROL IS CLOSED-LOOP.

转速信号反馈介绍


FG speed feedback signal is introduced

FG (Tach output type) Connection Diagram

Fan with FG function will create a square wave output. You can know fan speed by sensing the output wave frequency. Most dc fan have four pole. So when fan run for one round, there will be two high level pulse. About other Multipole brushless fan, high level pulse will be different.

But please notice if you want to sense it's output wave, there is an external circuit. Please check the circuit diagram below. There is no pull-up and VCC value limit. But please notice the Max I_{in} have to be small than 20mA.

Inside of DC fan

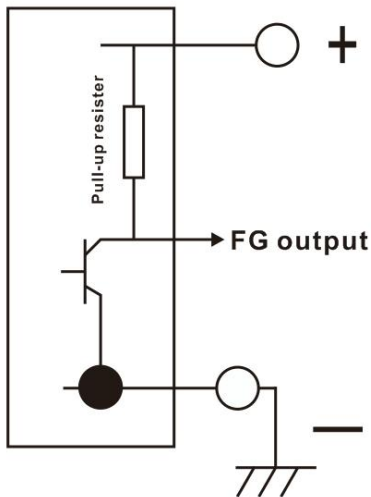

One revolution

