



深圳腾凯特种机电有限公司
SHENZHEN TENKAI GROUP LIMITED

SPECIFICATION FOR APPROVAL

规格承认书

To: 2301313039

产品型号 Par No. : BA5030H12B

类别 Category: ☐ Fan ☒ Blower ☐ Centrifugal

认证 Certification: ☒ CE ☒ ROHS ☐ UL ☐ TUV

编号 SpecNo: BA5030H12B-C251210 版次 Version: 01

样品数 Quantity: 1PCS 日期 Date: 2026-01-09


Company Stamp	CUSTOMER APPROVAL Stamp
	
制作: 薛雨均	承认:
复核: 张友桥	核准:
核准:	日期:

电话(TEL): 86-0755-23126453 传真(FAX): 86-0755-23129135

邮箱(MAIL): sales@tenkai-group.com

网址(WEB): [Http://www.tkfan.com](http://www.tkfan.com)

地址(ADD): 深圳市龙华区观澜格澜9路金雄达科技园C栋5楼

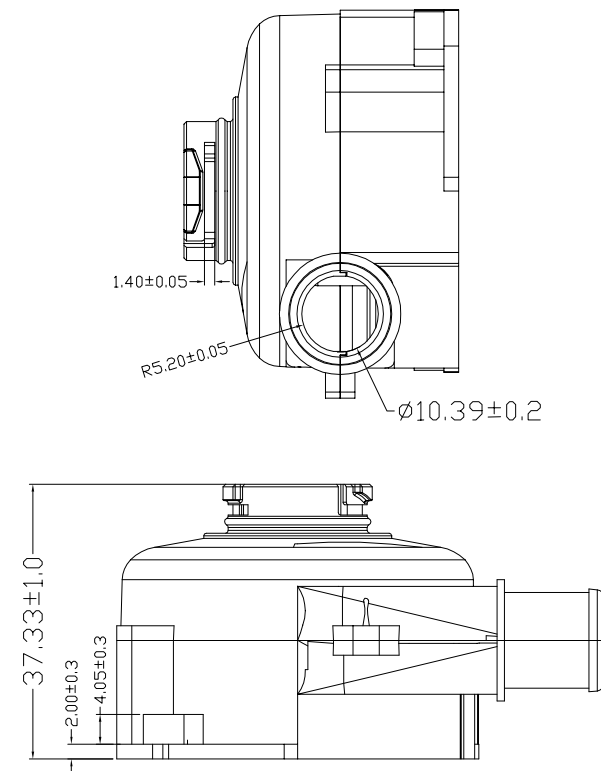

24mm

PIN4: BLUE WIRE---(PWM)

Mark 记号	REASON 变更原因	PROJECTION		单位 UNIT	深圳市腾凯特种机电有限公司						
				mm	SHENZHEN TENKAI GROUP LIMITED						
			比例 SCALE	型号	BA5030H12B			图号 Drawing NO.	BA5030H12B-C251210		
			1:1	Model NO.							
		公差 TOL	未标准公差 ±0.1 ±0.1° 未指定的边 C 0.1 已下 未指定的R角 R 0.1 已下 全区域没粉尘附着	ANGULAR X. ±0.5° X.X ±0.1°	制图	薛雨均	日期 Date	2026.01.09	描述 Description	DC BRUSHLESS BLOWER	
		It is prohibited to duplicate this document without explicit authorization or to hand it over to others for use.			检查 Check	张友桥	日期 Date	2026.01.09	材质 Material	页数 Page	1/1
					批准 Approved	日期 Date		表面 Finish	版次 Rev	A0	

規格參數

SPECIFICATION

Model 型号:			
Item 项目	Unit 单位	Specification 參數	Condition 條件
Dimension 尺寸	Mm 毫米	66X49X37	LxWxThickness 长宽高
Bearing System 轴承类型	----	Two Ball Bearing	----
Rated Voltage 额定电压	VDC	12	----
Operating Voltage Range 操作电压范围	VDC	9~16	At 25℃
Start-up Voltage 启动电压	VDC	≤7.5	At 25℃
Rated Current 额定电流	Amp 安培	2.5±10%	At Rated 在额定电压下
Lock Rotor Current 锁定电流	Amp 安培	0	Locked 锁死
Rated Power 额定功耗	Watt 瓦特	30±10%	At Rated 在额定电压下
Rated Speed 额定转速	RPM 圈/分钟	41000±10%	AT Rated Voltage 30℃
Air Flow 风量	CFM	8.2	In Free Air 无风阻条件
Static Air Pressure 静压	mmH ₂ O	522.5(正压)	When Air Flow=0
Noise Level 噪音	dBA	67.1	At Rated Speed 额定速
Polarity protection 反向保护	--	Reverse protection	NO
Other Spec.	Tachometer Output 转速反馈	YES	
	Soft-restart function 软启动	YES	
	Lock Protection 锁定保护	YES	
	Lock Rotor Alarm 锁定报警	NO	
	PWM Control 速度控制	YES	
	Thermal Control 过热保护	NO	
	Over voltage protection 过压保护	NO	
	Over current protection 过流保护	NO	
	fixed constant speed Function 恒速功能	NO	
Connection Lead Type 连接方式	Lead Wire 导线型号	150mm1061#22AWG	See Page 2 见图纸
	Connector 端子	安费诺AT04-6P-PM05	See Page 2 见图纸
Life Expectancy 预期寿命	Hours 小时	10000hrs	At 25℃ 在 25℃条件下
Net Weight 净重	g 克	87g	1PCS
备注 Note	内置驱动, IP68镀膜防水		

絕緣耐壓 Dielectric Strength	5Ma Max./導線与外框間測量，500VAC/min 5Ma Max./Measured between lead wire(+)and frame at 500VAC/min
極數 Number of Pole	4 極 4Poles
EMC	
運轉溫/濕度範圍 Operating temp. Range	溫度/temperature: -40℃~+65℃ 濕度/Humidity: 35%~85%RH
絕緣阻抗 Insulation Resistance	10MΩ /裸線与外框間測量，500VDC/min 10MΩ/between unshackled wire and frame at 500VDC/min
耐濕性 Humidity	電器規格依據 MIL-STD 202F Method 103B 濕度：95%RH，溫度：40±2℃ According to MIL-STD 202F Method 103B Humidity: 95%RH,Temp.: 40±2℃
熱衝擊 Thermal Shock	電器規格依據 MIL-STD 202F Method 107D According to MIL-STD 202F Method 107D
絕緣階段 Insulation Shock	UL: A 種 UL: Class A
包裝耐振試驗 Packing Vibration Test	包裝后，XYZ 施 1.1KG 測試 30 分鐘無損壞 Load Vibration test for 30min,No serious damage

MTBF REPORT

STARTED DATE: 2020.5.16

FINISHED DATE: 2020.10.20

TEST CONDITIONTEST
(1) VOLTAGE:24VDC
(2) TEMPERATURE:
75℃

ITEM

SPECIFICATION

TEST SAMPLES

20

OPERATION
VOLTAGE

12VDC

TEST HRS/EA

800

CUPPENT
DPAIN

MAX $\leq 2.5A \pm 10\%$

TOTAL TEST HRS

16000

SPEED

41000RPM $\pm 10\%$

FAILURE Q'TY

0

ACOUSTICAL
NOISE

CONFIDENCE
LEVEL

90%

MTBF

10440hours

FAILURE DEFINITION

ITEM

CHECK POINT AT THE HOURS

Over

(1) CURRENT:=
10%/-30%of

Original

value

TEST DURATION(HRS)

250

500

1k

1.5k

2k

2.2k

ACCUMULATED FAILURE Q'TY

0

0

0

0

0

0

SURVIVAL Q'TY

20

20

20

20

20

20

ACCUMULATED FAILURE RATIO

0%

0%

0%

0%

0%

0%

Over

(2) RPM:
30%/-15%of

Original

value

FAILNO.TEST TIME(HRS)SURVIVAL
Q'TY

ACCUMULATED FAIL RATIO
DESCRIPTION

TEST RESULT:

1. FORMULA OF FIGURING OUT ACCELERATION
FACTOR:

Tu: Required Temp (25℃)

Ta: Experiment

AF = $2 \wedge [(Ta - Tu)]$

Temp.(75℃)

= $2 \wedge [(65 - 25)/10]$

=17

MTBF=[ACTUAL TEST TIME*SAMPLE

Q'TY]*AF]/TR/SAMPLE Q'TY

MTBF=[(800*20)*17]/1.3026/20=10440HOURS

2. CONFIDENCE LEVEL:

ACCORDING TO GEM
TABLE90%

ZERO FAILURE TR=1.3026

APPROVED BY: BOPING
GONG

CHECKED BY: SHU LIN XIE

TESTED BY: JUN ZHANG

风扇特性曲线风量风压测试报告

The Report of Fan Performance P-Q Curve Test

1. 产品特性依照 AMCA-210 标准在双箱里包括风量与风压的测试。

The performance including air flow and air pressure measured in Double Chamber is measured according to AMCA210-92 standard.


测试编号(No.): 6937 测试日期(Date) : 2026/01/09

2.测试数据:

序号 No.	项目 Item	规格 Specification	单位 Unit
1	测试电压 Test Voltage	12	VDC
2	转速 Speed	41550	RPM
3	大气压力 Barometric Pressure	761.5	mmHg
4	相对湿度 Relative Humidity	47	%
5	最大风量(零静压时)Max.Air Flow(At Zero Static Pressure)	8.2	CFM
6	最大风压（零风量时）Max. Air Pressure(At Zero Air Flow)	522.5	mmH ₂ O

3.P-Q 数据及曲线 P-Q Data and Curve

序号	mmAq	CFM	A	Watt	RPM
1	522.5	0	0.81	9.8	46550
2	418.5	3.19	1.65	19.9	44100
3	293.75	5.04	2.03	24.6	42933
4	172	6.51	2.27	27.4	42167
5	111.25	7.19	2.35	28.5	41900
6	72.5	7.47	2.4	29	41750
7	50.25	7.72	2.41	29.2	41658
8	0	8.19	2.45	29.7	41550

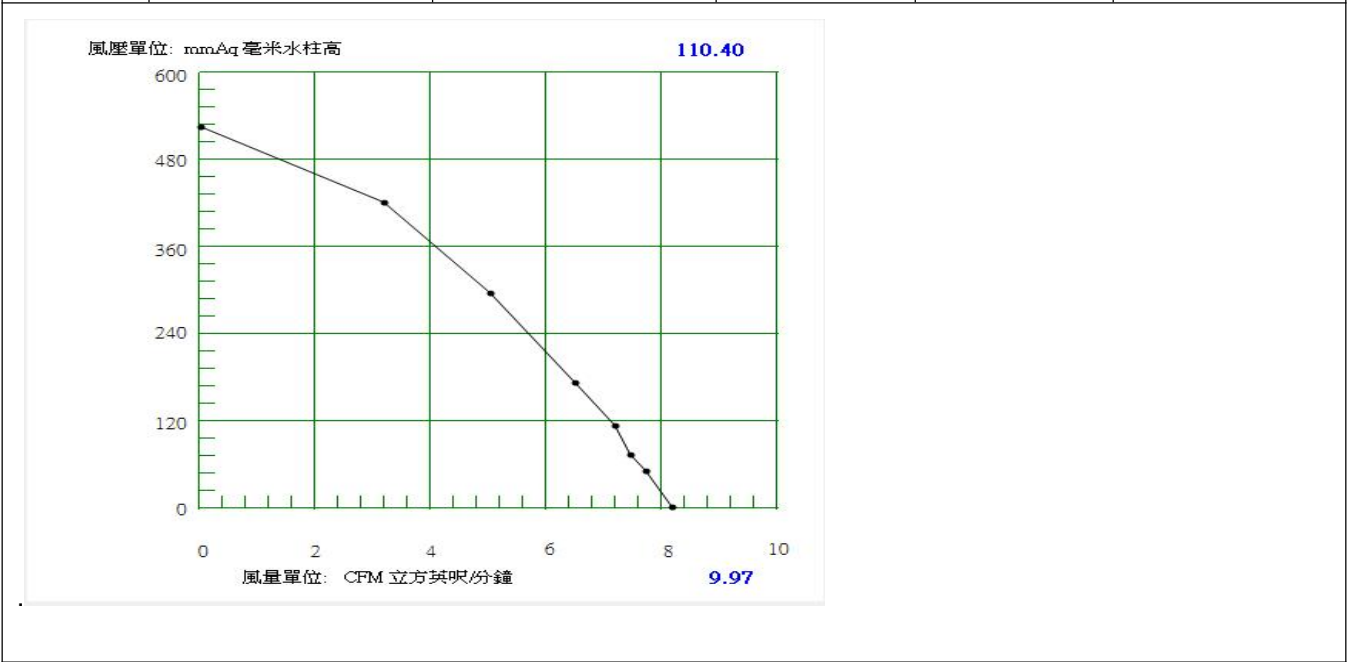

风扇特性曲线 PWM 测试报告

The Report of Fan Performance PWM Curve Test


1.测试数据:

测试编号(No.):7564

测试日期(Date) : 2026-01-09

序号	百分比	转速	单位 Unit
1	15 %	9650	RPM
2	20 %	11600	RPM
3	30 %	15400	RPM
4	40 %	19400	RPM
5	50 %	23000	RPM
6	60 %	26400	RPM
7	70 %	30400	RPM
8	80 %	33600	RPM
9	90 %	36800	RPM
10	100 %	41200	RPM

2.PWM 数据及曲线 PWM Data and Curve

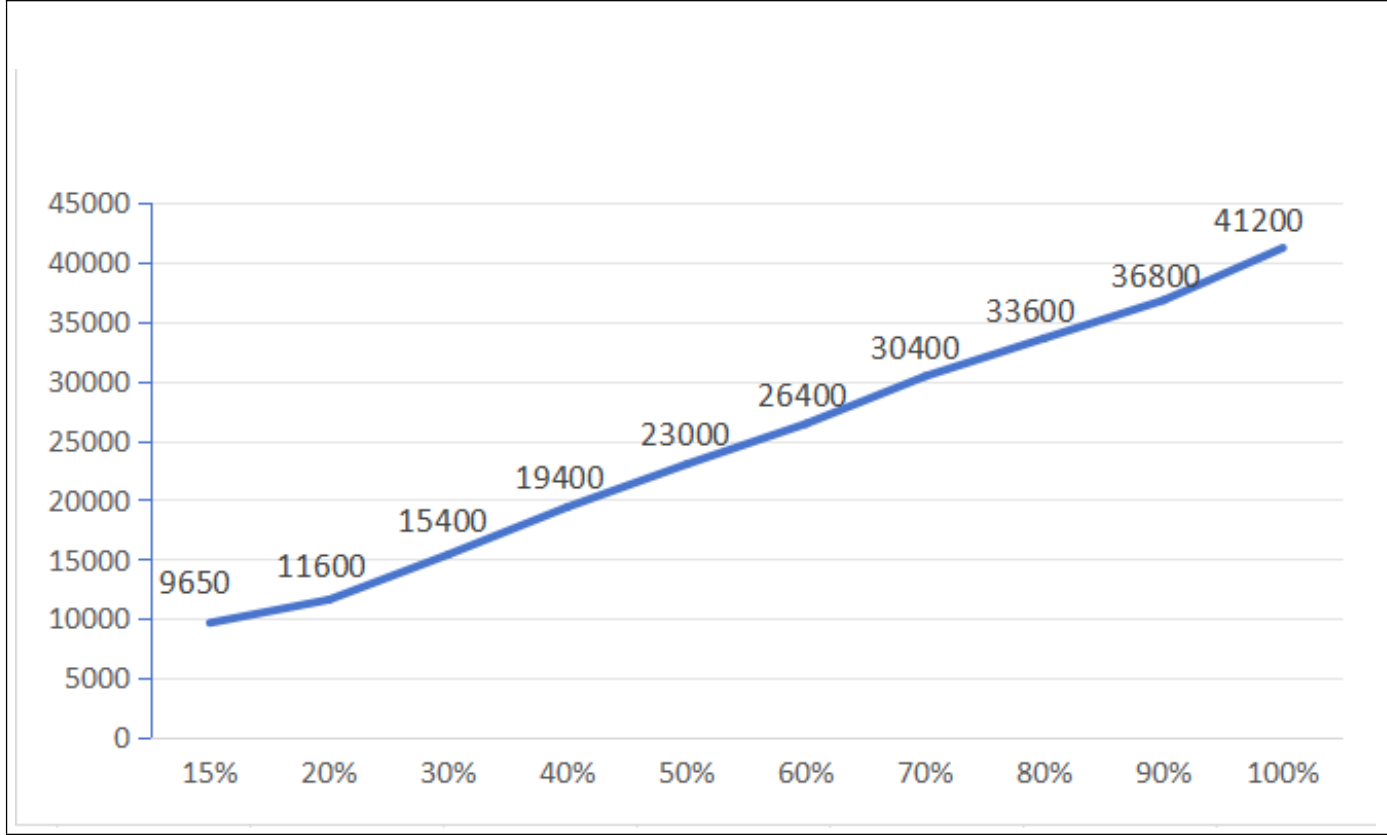

噪音测试报告

The Report of Acoustic Noise Test


报告编号 Report No.TN1511309

样品名称 Sample Name	Brushless Fan / Blower
测试条件 Test Condition	测试方法 Test Method
1.温度 Temperature: 31 °C 2.湿度 Humidity: 75 %RH	1.测试位置 Test Position : 180° 2.测试距离 Test Distance:1.0M From the fan intake 3.背景噪音 Background Noise: 22.0dB(A) 4.测试依照标准 ISO3745 执行 This test executes according to ISO3745 standard


测试设备 Test Equipment:
声望 VA-Lab2 二通道噪声频谱分析仪 BSWA VA-Lab2 double channels noise Spectrum Analyzer

测试结果 Test Result: Leq:67.1dB(A); 测试距离 Test distance: 1 meter

倍频段频谱图 Octave-Band(1m)


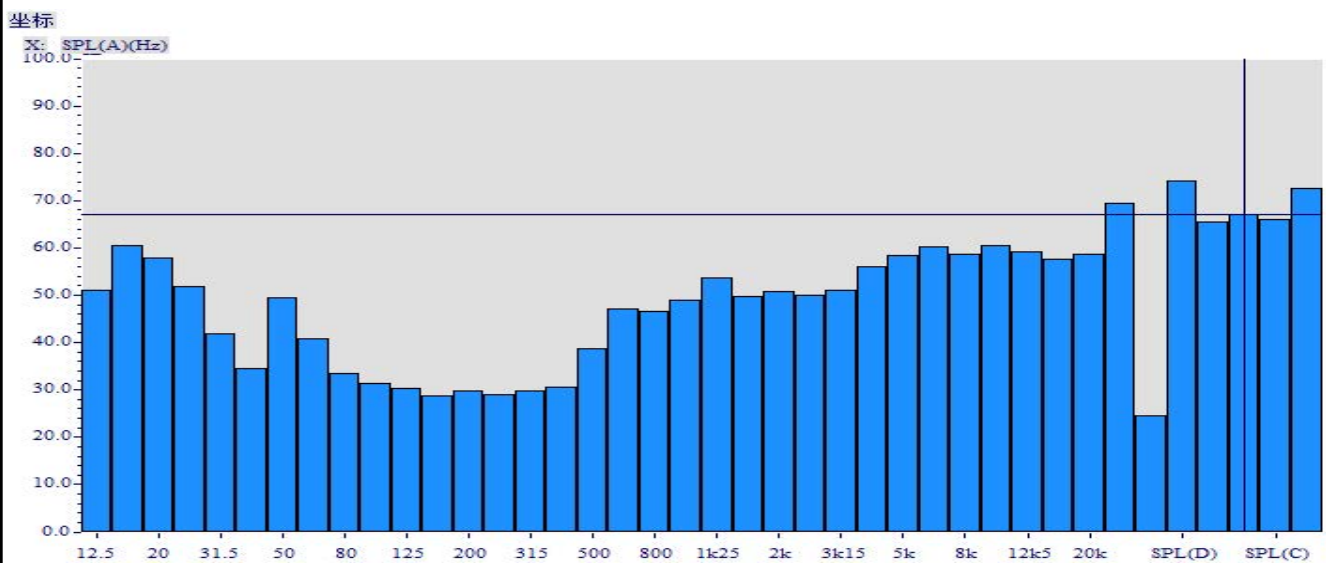


测试结果 Test Result: Leq:22.0dB(A); 背景噪音 Background Noise

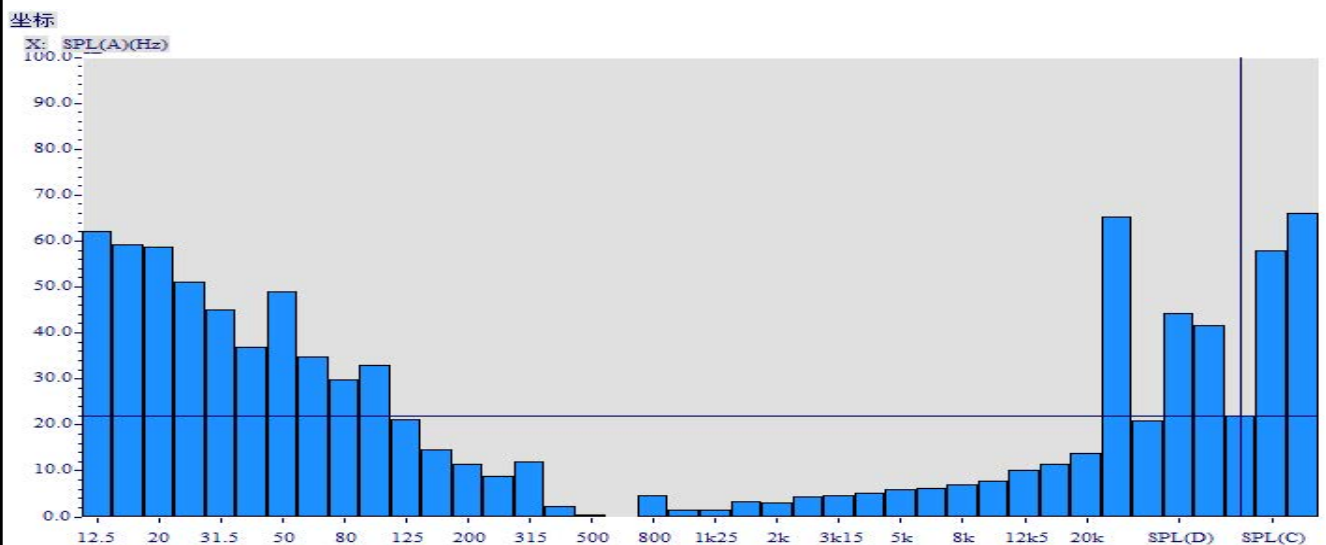

※本报告未经许可严禁擅自更改其中内容 Do not change the content of this report without written permission of authority;
※一般情况, 委托检验结果仅对所检验样品有效 Generally, commission test is responsible for the tested samples only;
※报告无主检、审核人签字无效 The test report is invalid without the signatures of Author and Reviewer.

实物图
The pictures

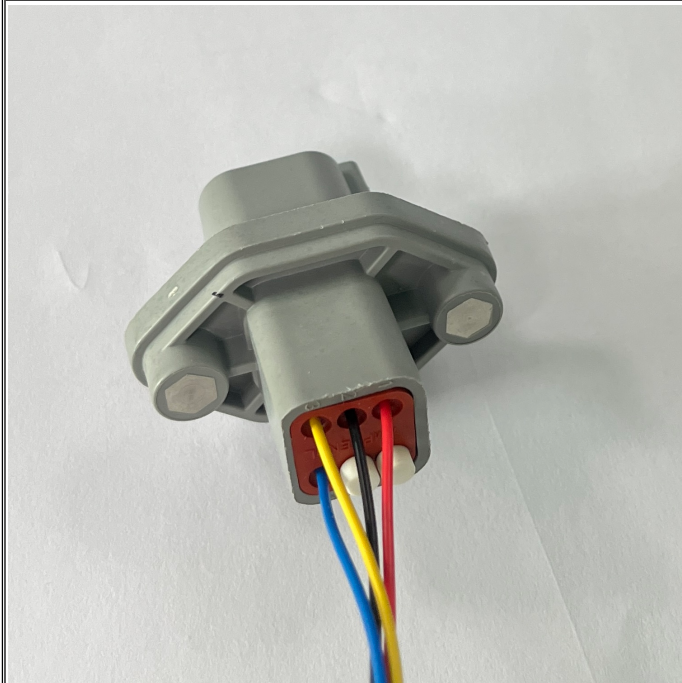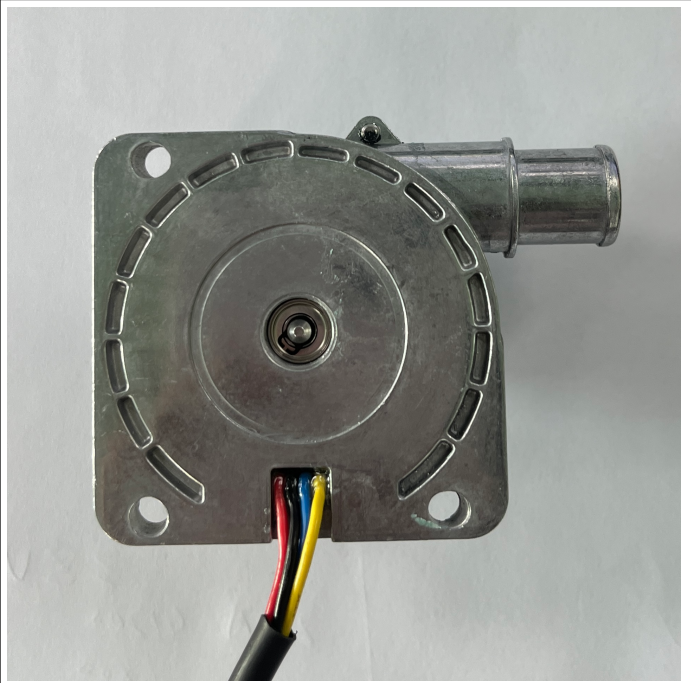


功能描述

Functional description

一. PWM CONTROL SIGNAL PWM 控制信号:

SIGNAL VOLTAGE RANGE 控制电压输入范围:0.0~+5.0VDC

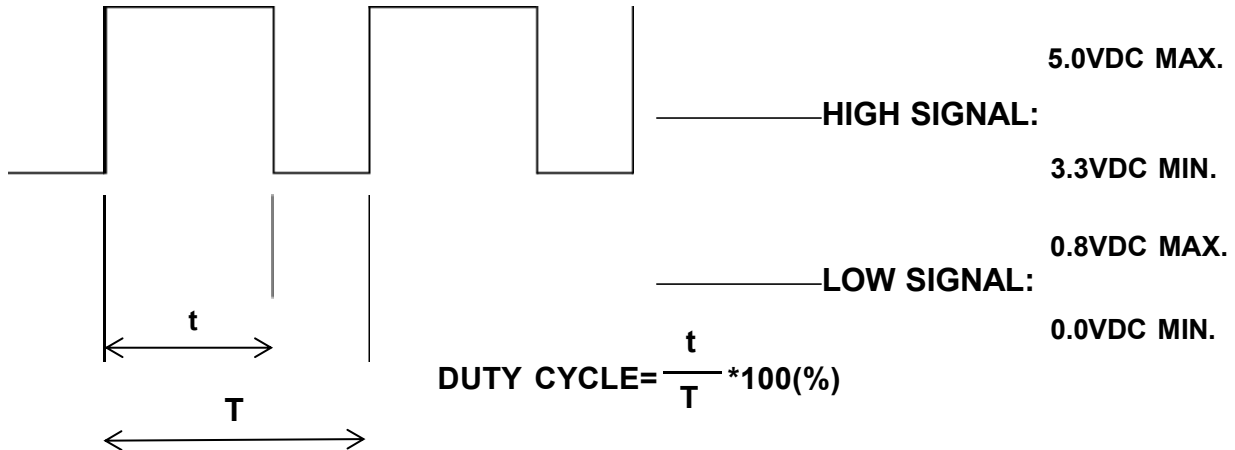

- THE FREQUENCY FOR CONTROL SIGNAL OF THE FAN SHALL BE ABLE TO ACCEPT 16K~32 KHZ.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 25K HZ.
- AT 100% DUTY CYCLE,THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE,THE ROTOR WILL STOP.
- WHEN CONTROL SIGNAL LEAD DISCONNECTED,THE FAN WILL MAXIMUM SPEED.
- AT 25K 9% ,~11% DUTY CYCLE,THE FAN WILL BE ABLE TO START FROM A DEAD STOP.
- THE FAN SPEED CONTROL IS CLOSED-LOOP.

转速信号反馈介绍

FG speed feedback signal is introduced

FG (Tach output type) Connection Diagram

Fan with FG function will create a square wave output. You can know fan speed by sensing the output wave Frequency. Most dc fan have four pole. So when fan run for one round, there will be two high level pulse. About other Multipole brushless fan, high level pulse will be different.

But please notice if you want to sense it's output wave, there is an external circuit. Please check the circuit Diagram below. There is no pull-up and VCC value limit. But please notice the Max I_{in} have to be small than 20mA.

Inside of DC fan

